



- Expert Verified, Online, **Free**.

Which two statements regarding device management on FortiManager are true? (Choose two.)

- A. FortiGate devices in HA cluster devices are counted as a single device.
- B. FortiGate in transparent mode configurations are not counted toward the device count on FortiManager.
- C. FortiGate devices in an HA cluster that has five VDOMs are counted as five separate devices.
- D. The maximum number of managed devices for each ADOM is 500.

Suggested Answer: AC

Community vote distribution

AC (100%)

🗳️ **saray_2020** 2 years, 9 months ago

Selected Answer: AC

A & C correct
upvoted 2 times

🗳️ **coredpt** 2 years, 12 months ago

A and C
upvoted 1 times

🗳️ **coredpt** 2 years, 12 months ago

A and C
upvoted 1 times

🗳️ **kolou** 3 years, 2 months ago

A,C confirmed
upvoted 2 times

🗳️ **mmelo** 3 years, 9 months ago

A & C correct
upvoted 2 times

🗳️ **rcharger00** 3 years, 10 months ago

A & C correct
upvoted 2 times

An administrator wants to delete an address object that is currently referenced in a firewall policy.

What can the administrator expect to happen?

- A. FortiManager will replace the deleted address object with the none address object in the referenced firewall policy.
- B. FortiManager will not allow the administrator to delete a referenced address object.
- C. FortiManager will replace the deleted address object with the all address object in the referenced firewall policy.
- D. FortiManager will disable the status of the referenced firewall policy.

Suggested Answer: A

- 🗨️ 👤 **coredpt** 2 years, 12 months ago
A is correct
upvoted 1 times
- 🗨️ 👤 **adolfus** 3 years ago
Tested in my lab. It works. A is the correct answer
upvoted 1 times
- 🗨️ 👤 **JuanTrabal** 3 weeks, 2 days ago
You have not tested anything.
upvoted 1 times
- 🗨️ 👤 **FortiSherlock** 3 years ago
A is indeed correct, 6.4 Study Guide p. 212
upvoted 1 times
- 🗨️ 👤 **yadavarya97** 3 years, 2 months ago
A is correct.
upvoted 1 times
- 🗨️ 👤 **geegee2021** 3 years, 3 months ago
It is possible to delete a use object name on Fortimanager and it will replace it with a none object
upvoted 1 times
- 🗨️ 👤 **xijiansh** 3 years, 7 months ago
A is correct
upvoted 1 times
- 🗨️ 👤 **Dee244** 3 years, 8 months ago
A is correct
page 212, study guide 6.4
upvoted 2 times
- 🗨️ 👤 **rcharger00** 3 years, 10 months ago
A correct
upvoted 2 times

Refer to the exhibit.

Import Device - Local-FortiGate [root]

Create a new policy package for import.

Policy Package Name	<input type="text" value="Local-FortiGate"/>
Folder	<input type="text" value="root"/>
Policy Selection	<input checked="" type="radio"/> Import All (3) <input type="radio"/> Select Policies and Profile Groups to Import
Object Selection	<input type="radio"/> Import only policy dependent objects <input checked="" type="radio"/> Import all objects

An administrator is importing a new device to FortiManager and has selected the options shown in the exhibit. What will happen if the administrator makes the changes and installs the modified policy package on this managed FortiGate?

- A. The unused objects that are not tied to the firewall policies locally on FortiGate will be deleted.
- B. The unused objects that are not tied to the firewall policies in the policy package will be deleted from the FortiManager database.
- C. The unused objects that are not tied to the firewall policies will remain as read-only locally on FortiGate.
- D. The unused objects that are not tied to the firewall policies will be installed on FortiGate.

Suggested Answer: A

🗨️ **Makotico** 2 years, 7 months ago

D, is correct, on the FMG-6.4 page 223: But if you choose to import all objects, then the system imports all used and unused objects in the FortiManager ADOM object database and can use them later by referencing the polices on FortiManager and installing them on the managed devices

upvoted 2 times

🗨️ **juvemerda** 2 years, 6 months ago

A is correct.

The text you are referring to is about importing the objects to FMG database so that FMG will be able to use those objects in future policies. However, the question is what will happen the next time FMG installs a policy package to the FortiGate and the correct answer is A. FMG will delete unused objects locally from FG because the FMG have imported the objects.

upvoted 3 times

🗨️ **saray_2020** 2 years, 9 months ago

A, is correct. Tested on my lab!

upvoted 1 times

🗨️ **JuanTrabal** 2 years, 1 month ago

You have not tested anything. You have copied the results from other tests.

upvoted 4 times

🗨️ **soporte127** 1 year, 7 months ago

is A la option?

upvoted 2 times

🗨️ **coredpt** 2 years, 12 months ago

A is correct

upvoted 1 times

🗨️ **adolfus** 3 years ago

A, is correct. Tested on my lab. When I install the policy package on fortigate. All unused objects are deleted from the fortigate.

upvoted 1 times

🗨️ 👤 **raptuz** 3 years ago

i think is the C, on the FMG-6.4 page 223: But if you choose to import all objects, then the system imports all used and unused objects in the FortiManager ADOM object database and can use them later by referencing the policies on FortiManager and installing them on the managed devices

upvoted 1 times

🗨️ 👤 **Cyril_the_Squirrel** 2 years, 10 months ago

This is true only for import. Unused objects will be deleted on local FTG.

<http://docs.fortinet.com/document/fortimanager/6.4.4/administration-guide/92081/install-a-policy-package>

upvoted 2 times

🗨️ 👤 **xijiansh** 3 years, 7 months ago

A, it's in sample questions of NES training materials

upvoted 2 times

🗨️ 👤 **mmelo** 3 years, 9 months ago

A is correct

upvoted 1 times

🗨️ 👤 **rcharger00** 3 years, 10 months ago

A is correct

upvoted 1 times

Which of the purpose of the Policy Check feature on FortiManager?

- A. It compares the policy packages with the revision history, and updates policy packages in the ADOM database.
- B. It merges and creates dynamic mappings for duplicate objects used in a policy package.
- C. It provides recommendation to combine similar policy packages within an ADOM into one single policy package.
- D. It provides recommendation for optimizing policies in a policy package.

Suggested Answer: *D*

🗨️ 👤 **coredpt** 2 years, 12 months ago

D is correct

upvoted 1 times

🗨️ 👤 **yadavarya97** 3 years, 2 months ago

D is correct.

upvoted 2 times

🗨️ 👤 **pdanov** 3 years, 6 months ago

p 213 study guide

upvoted 1 times

🗨️ 👤 **mmelo** 3 years, 9 months ago

D is correct

upvoted 1 times

🗨️ 👤 **rcharger00** 3 years, 10 months ago

D is correct

• Policy check

○ Checks for duplication where 2 objects have identical definitions

upvoted 2 times

Which two statements about Security Fabric integration with FortiManager are true? (Choose two.)

- A. The Security Fabric license, group name and password are required for the FortiManager Security Fabric integration
- B. The Fabric View module enables you to generate the Security Fabric ratings for Security Fabric devices
- C. The Security Fabric settings are part of the device level settings
- D. The Fabric View module enables you to view the Security Fabric ratings for Security Fabric devices

Suggested Answer: *CD*

- 🗨️ **coredpt** 2 years, 12 months ago
C and D, Fortimanager 6.4 page 287
upvoted 3 times
- 🗨️ **LSamuel** 3 years, 2 months ago
C&D Correct
upvoted 1 times
- 🗨️ **[Removed]** 3 years, 4 months ago
C&D Correct
Page 299
upvoted 2 times
- 🗨️ **rcharger00** 3 years, 10 months ago
C&D Correct
upvoted 2 times

Refer to the exhibit.

Create New CLI Script

Script Name

Comments 0/255

Type

Run script on

[\[View Sample Script\]](#)

Script details

```

config router prefix-list
edit public
config rule
edit 1
set prefix 0.0.0.0/0
set action permit
next
edit 2
set prefix 8.8.8.8/32
set action deny
end

```

[Advanced Device Filters >](#)


OK Cancel

Which two statements are true if the script is executed using the Device Database option? (Choose two.)

- A. You must install these changes using the Install Wizard to a managed device
- B. The successful execution of a script on the Device Database will create a new revision history
- C. The script history will show successful installation of the script on the remote FortiGate
- D. The Device Settings Status will be tagged as Modified

Suggested Answer: BC

Community vote distribution



humblelearner Highly Voted 3 years, 10 months ago

A & D are the correct one

upvoted 17 times

georgianp Highly Voted 3 years, 8 months ago

A & D, if you run a script on the device database, it will not create a new revision. It will create one after you install the policy to the device

upvoted 7 times

AVINDIA Most Recent 2 years, 4 months ago

Selected Answer: AD

AD is correct.

upvoted 2 times

python_tamer 2 years, 4 months ago

Selected Answer: AD

AD is correct.

upvoted 2 times

jarz 2 years, 8 months ago

Selected Answer: AD

A and D are the correct answers

upvoted 2 times

🗨️ **damcol** 2 years, 8 months ago

A: if you run a script on a device database or on a policy package, you must perform an installation on the managed device. ---> If the script runs on device db is not installed automatically on the device.

D: Correct. The script modifies the device database but is not yet installed on the managed device.

B: is wrong because the "revision" is created when the script run in the remote FortiGate directly.

C: is wrong because you haven't run the script on the remote FortiGate yet.

upvoted 1 times

🗨️ **Kevin4work** 2 years, 8 months ago

Selected Answer: AD

A D are correct

upvoted 1 times

🗨️ **saray_2020** 2 years, 9 months ago

A & D are correct

upvoted 1 times

🗨️ **josemlito** 2 years, 9 months ago

C and D are the correct.

upvoted 1 times

🗨️ **Cyril_the_Squirrel** 2 years, 10 months ago

Selected Answer: BC

A is Wrong. You also have ability to execute TCL or CLI scripts directly on managed device.

D is wrong, "Modified" is when the device database is updated on FMG and not yet installed on managed device.

upvoted 1 times

🗨️ **wili0001** 2 years, 12 months ago

A y D are correct

upvoted 1 times

🗨️ **coredpt** 2 years, 12 months ago

A correct, FMG 6.4 page 181,

B correct, FMG 6.4 page 182.

upvoted 1 times

🗨️ **raptuz** 2 years, 11 months ago

it create a new revision only if is executed directly on the device, in this case it's executed on device db, so no rev

upvoted 1 times

🗨️ **jbernard** 3 years ago

A and D

upvoted 1 times

🗨️ **yadavarya97** 3 years, 2 months ago

A & D are correct

upvoted 2 times

🗨️ **SamX** 3 years, 6 months ago

A & D are correct

upvoted 3 times

🗨️ **Straider** 3 years, 6 months ago

A & D are correct


upvoted 2 times

🗨️ **jcisnerosm** 3 years, 9 months ago

A & D 100%

upvoted 1 times

Refer to the exhibit.

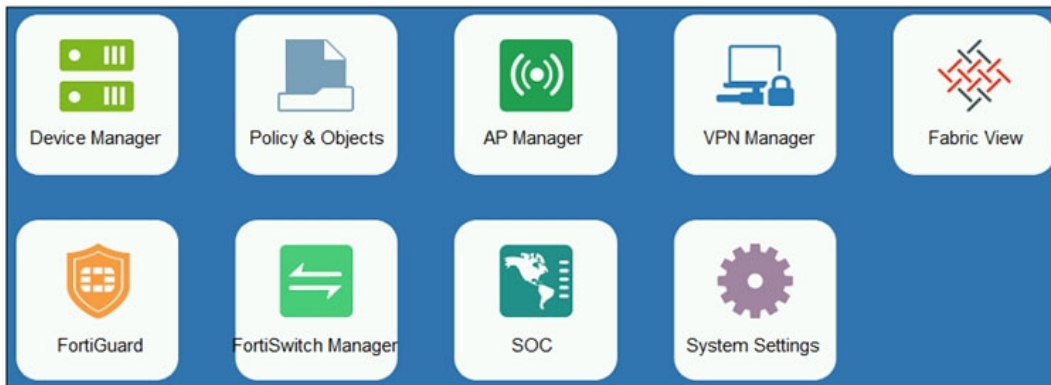

An administrator logs into the FortiManager GUI and sees the panes shown in the exhibit.

Which two reasons can explain why the FortiAnalyzer feature panes do not appear? (Choose two.)

- A. The administrator logged in using the unsecure protocol HTTP, so the view is restricted.
- B. The administrator profile does not have full access privileges like the Super_User profile.
- C. The administrator IP address is not a part of the trusted hosts configured on FortiManager interfaces.
- D. FortiAnalyzer features are not enabled on FortiManager.

Suggested Answer: CD

Community vote distribution

BD (100%)

keeper2020 Highly Voted 4 years, 1 month ago

I think B and D

upvoted 18 times

akster Highly Voted 4 years, 1 month ago

is B and D. C is wrong if u are not on the trusted hosts, u can't even log in.

upvoted 14 times

h0p3l3ss Most Recent 2 years, 2 months ago

Selected Answer: BD

B and D

upvoted 2 times

rober22 2 years, 8 months ago

Selected Answer: BD

B and D

upvoted 1 times

bastien95 2 years, 8 months ago

Selected Answer: BD

Not C, not trusted = no access at all

upvoted 1 times

damcol 2 years, 8 months ago

B and D

upvoted 1 times

raptuz 2 years, 12 months ago

Selected Answer: BD

if an administrator as IP outside the trusted hosts, i can't reach the FortiManager GUI

upvoted 1 times

coredpt 2 years, 12 months ago

B and D
upvoted 1 times

🗨️ 👤 **jbernard** 3 years ago
B and D
upvoted 1 times

🗨️ 👤 **SamX** 3 years, 6 months ago
B & D are correct
upvoted 3 times

🗨️ 👤 **Straider** 3 years, 6 months ago
B & D are correct
upvoted 2 times

🗨️ 👤 **mmelo** 3 years, 9 months ago
B and D are correct
upvoted 2 times

🗨️ 👤 **Primo_SP** 3 years, 11 months ago
B and D are correct
upvoted 5 times

🗨️ 👤 **yigiton** 3 years, 11 months ago
B and D are correct.
upvoted 5 times

🗨️ 👤 **demifsud** 4 years ago
Definitely B and D
upvoted 5 times

Which two items are included in the FortiManager backup? (Choose two.)

- A. FortiGuard database
- B. Global database
- C. Logs
- D. All devices

Suggested Answer: *BD*

Reference:

<https://kb.fortinet.com/kb/viewContent.do?externalId=FD34549>

Community vote distribution

BD (100%)

🗳️ 👤 **damcol** 2 years, 8 months ago

Selected Answer: BD

B & D are correct
upvoted 2 times

🗳️ 👤 **coredpt** 2 years, 12 months ago

B and D
upvoted 2 times

🗳️ 👤 **jbernard** 3 years ago

B and D
upvoted 1 times

🗳️ 👤 **SamX** 3 years, 6 months ago

B & D are correct
upvoted 4 times

🗳️ 👤 **mmelo** 3 years, 9 months ago

B&D correct
upvoted 2 times

🗳️ 👤 **rcharger00** 3 years, 10 months ago

B&D correct
upvoted 2 times

Refer to the exhibit.

```
# diagnose fmupdate view-serverlist fds
FortiGuard Server Comm : Enabled
Server Override Mode   : Loose
FDS server list       :
Index Address          Port      TimeZone  Distance  Source
-----
*0    10.0.1.50            8890     -5        0         CLI
1     96.45.33.89          443      -5        0         FDNI
2     96.45.32.81          443      -5        0         FDNI
. . .
38    fds1.fortinet.com    443      -5        0         DEFAULT
```

How will FortiManager try to get updates for antivirus and IPS?

- A. From the list of configured override servers that have the ability to fall back to public FDN servers
- B. From the configured override server list only.
- C. From public FDNI servers with highest index number only.
- D. From the default server `fds1.fortinet.com`.

Suggested Answer: A

 **pross** Highly Voted 3 years, 10 months ago

A is correct because there is an override server set. You can tell this because it says the source of CLI next to it. If that server is down it can fail over to the `fds` public servers in loose mode.

upvoted 11 times

 **coredpt** Most Recent 2 years, 12 months ago


A is correct

upvoted 1 times

 **yadavarya97** 3 years, 2 months ago

A is correct. * means the best one correct active and if fails that is why loose and override.


upvoted 3 times

 **Ping2Jo** 3 years, 5 months ago

Answer A is correct.


FYI, it was mentioned in the NSE 5 FortiManager 6.2 Self-Paced course.

upvoted 2 times

 **ami376** 3 years, 6 months ago


Answer A is correct

upvoted 1 times

 **Dee244** 3 years, 8 months ago

D is correct, it asks for the IPS and antivirus not what will happen when you set the mode to loose. Check Study guide page 351.

upvoted 1 times

 **mmelo** 3 years, 9 months ago

A is correct

upvoted 1 times

 **Crizzz** 3 years, 10 months ago

D is correct.

Source: page 351 Study Guide

upvoted 1 times

 **rcharger00** 3 years, 10 months ago

A correct

upvoted 3 times

An administrator's PC crashes before the administrator can submit a workflow session for approval. After the PC is restarted, the administrator notices that the ADOM was locked from the session before the crash. How can the administrator unlock the ADOM?

- A. Restore the configuration from a previous backup.
- B. Log in as Super_User in order to unlock the ADOM.
- C. Log in using the same administrator account to unlock the ADOM.
- D. Delete the previous admin session manually through the FortiManager GUI or CLI.

Suggested Answer: C

Community vote distribution

D (100%)

- 🗉 **MrRobot316** Highly Voted 4 years, 1 month ago
Should be D
upvoted 12 times
- 🗉 **bastien95** Most Recent 2 years, 8 months ago
Selected Answer: D
D is correct
upvoted 2 times
- 🗉 **jarz** 2 years, 8 months ago
Selected Answer: D
D is correct, you need to manually whack the stale session
upvoted 2 times
- 🗉 **Kevin4work** 2 years, 8 months ago
Selected Answer: D
Should be D
upvoted 2 times
- 🗉 **damcol** 2 years, 8 months ago
Selected Answer: D
D. If a connection crashes the ADOM remain locked until the administrator session times out or the session is deleted. You can delete the session on the GUI or CLI.
upvoted 2 times
- 🗉 **mau_80** 2 years, 11 months ago
D is correct: You can delete administrator sessions on the GUI or CLI. After the previous session is deleted, the ADOM will be unlocked immediately.
upvoted 2 times
- 🗉 **coredpt** 2 years, 12 months ago
Delete the previous admin session, D is correct
upvoted 1 times
- 🗉 **nimesh_netco** 3 years, 2 months ago
D is correct. FortiManager_6.4_Study_Guide-Online page 245
upvoted 2 times
- 🗉 **LSamuel** 3 years, 2 months ago
C is correct. D is wrong - you are not able to clear a session via GUI, only CLI.
upvoted 2 times
- 🗉 **farhan79** 2 years, 12 months ago
It can be done both GUI & CLI. Already tested. Also in 6.2 guide, page 243.

upvoted 1 times

🗨️ **mau_80** 2 years, 11 months ago

You can delete administrator sessions on the GUI or CLI

upvoted 1 times

🗨️ **Cyril_the_Squirrel** 2 years, 10 months ago

D is Correct

Check here:

<http://docs.fortinet.com/document/fortimanager/6.4.4/administration-guide/357486/locking-an-adom>

upvoted 1 times

🗨️ **MortenB** 3 years, 5 months ago

D see study guide p.245

upvoted 3 times

🗨️ **Ping2Jo** 3 years, 5 months ago

Answer D is correct.

upvoted 1 times

🗨️ **RBLOG** 3 years, 6 months ago

It's a D. you should kill the admin session before unlocking the said ADOM.

-rblog

upvoted 1 times

🗨️ **SamX** 3 years, 6 months ago

D is correct

upvoted 1 times

🗨️ **Straider** 3 years, 6 months ago

D is correct

upvoted 1 times

🗨️ **xijiansh** 3 years, 8 months ago

D is the correct one

upvoted 1 times

🗨️ **Dee244** 3 years, 8 months ago

D is correct, Study guide page 243

upvoted 2 times

🗨️ **inculto** 3 years, 9 months ago

C correct, D no

upvoted 2 times

Refer to the exhibit.

```
config system global
set workspace-mode normal
end
```

Given the configuration shown in the exhibit, which two statements are true? (Choose two.)

- A. It allows two or more administrators to make configuration changes at the same time, in the same ADOM.
- B. It disables concurrent read-write access to an ADOM.
- C. It allows the same administrator to lock more than one ADOM at the same time.
- D. It is used to validate administrator login attempts through external servers.

Suggested Answer: BC

Reference:

<https://docs.fortinet.com/document/fortimanager/6.0.4/administration-guide/86456/concurrent-adom-access>

Community vote distribution

AC (100%)

🗨️ **Power_Shell** 2 years, 1 month ago

The concurrent read access is only disabled within the Fortimanager Database, but not the ADOM.
upvoted 1 times

🗨️ **Power_Shell** 2 years, 1 month ago

Selected Answer: AC

Policy locking allows administrators to work on, and lock a single policy package instead of locking the whole ADOM. You can either lock the whole ADOM or a specific policy package. It allows multiple administrators to work on separate policy package in the same ADOM.
upvoted 1 times

🗨️ **coredpt** 2 years, 12 months ago

B and C are correct
upvoted 2 times

🗨️ **yadavarya97** 3 years, 2 months ago

B & C are correct.
(global)# set workspace-mode
disabled Workspace disabled.
normal Workspace lock mode.
per-adom Per-Adom workspace mode.
workflow Workspace workflow mode.
upvoted 1 times

🗨️ **xijiansh** 3 years, 8 months ago

content in the link does not say B is correct
upvoted 1 times

🗨️ **Dee244** 3 years, 8 months ago

B & C are correct
upvoted 2 times

Refer to the exhibit.

```
Start to import config from device(Local-FortiGate) vdom(root) to
adom(My_ADOM), package(Local-FortiGate_root)
```

```
"firewall service category",SKIPPED,"(name=General, oid=697, DUPLICATE)"
```

```
"firewall address",SUCCESS,"(name=LOCAL_SUBNET, oid=684, new object)"
```

```
"firewall service custom",SUCCESS,"(name=ALL, oid=863, update previous
object)"
```

```
"firewall policy",SUCCESS,"(name=1, oid = 1090, new object)"
```

Which statement about the object named ALL is true?

- A. FortiManager updated the object ALL using the FortiGate value in its database.
- B. FortiManager installed the object ALL with the updated value.
- C. FortiManager created the object ALL as a unique entity in its database, which can be only used by this managed FortiGate.
- D. FortiManager updated the object ALL using the FortiManager value in its database.

Suggested Answer: A

Community vote distribution


A (100%)

 **rcharger00** Highly Voted 3 years, 10 months ago


A correct
upvoted 8 times

 **Bob_Oso** Most Recent 2 years, 6 months ago

Selected Answer: A
A is correct - FortiManager_6.4_Study_Guide-Online page 121
upvoted 1 times

 **coredpt** 2 years, 12 months ago

A is correct
upvoted 1 times

 **SamX** 3 years, 6 months ago

A correct
upvoted 3 times

Refer to the exhibit.

Create New ADOM

Name: Training

Type: FortiGate (6.2, 6.0, 5.6, 5.4)

Comments:

Devices: + Select Device

Name	IP Address	Platform
Click to select devices for this ADOM.		

Mode: Normal Backup

Which two statements about an ADOM set in Normal mode on FortiManager are true? (Choose two.)

- A. It supports the FortiManager script feature
- B. It allows making configuration changes for managed devices on FortiManager panes
- C. FortiManager automatically installs the configuration difference in revisions on the managed FortiGate
- D. You cannot assign the same ADOM to multiple administrators

Suggested Answer: BC

Community vote distribution

AB (100%)

JJ22 Highly Voted 4 years ago

A & B is correct

upvoted 15 times

yigiton Highly Voted 3 years, 11 months ago

A & B correct

upvoted 6 times

h0p3l3ss Most Recent 2 years, 2 months ago

Selected Answer: AB

AB for sure!

upvoted 3 times

damcol 2 years, 8 months ago

A & B

FortiManager script are available both in Normal and Backup mode.

C is wrong, FMG does not automatically install changes. FMG updates only device settings made on the FortiGate directly.

upvoted 2 times

mau_80 2 years, 11 months ago

A & B are OK

upvoted 1 times

ahmadkarrubi 2 years, 11 months ago

A & B correct

upvoted 1 times

🗨️ 👤 **raptuz** 2 years, 12 months ago

Selected Answer: AB

FortiManager doesn't install automatically the changes
upvoted 2 times

🗨️ 👤 **coredpt** 2 years, 12 months ago

A and B
upvoted 1 times

🗨️ 👤 **yadavarya97** 3 years, 2 months ago

A & B correct
upvoted 1 times

🗨️ 👤 **RBLOG** 3 years, 6 months ago

A & B FINAL!
-rblog
upvoted 2 times

🗨️ 👤 **SamX** 3 years, 6 months ago

A B are correct
upvoted 1 times

🗨️ 👤 **Straider** 3 years, 6 months ago

A & B are correct
upvoted 1 times

🗨️ 👤 **xijiansh** 3 years, 8 months ago

Agree A&B
upvoted 1 times

🗨️ 👤 **Mr_Bello** 3 years, 8 months ago

A&B 100%
upvoted 1 times

🗨️ 👤 **Hajji1986** 3 years, 9 months ago

B,c
https://help.fortinet.com/fmgr/50hlp/56/5-6-1/FMG-FAZ/0800_ADOMs/0600_ADOM%20Modes.htm
upvoted 1 times

🗨️ 👤 **lp3** 3 years, 9 months ago

The Fortimanager doesn't install settings automatically.
A & B correct.

Also the link you sent doesn't say anything about automatically installing:

"FortiGate units in the ADOM will query their own configuration every 5 seconds. If there has been a configuration change, the FortiGate unit will send a diff revision on the change to the FortiManager using the FGFM protocol."

upvoted 3 times

🗨️ 👤 **mau_80** 2 years, 11 months ago

Correct, so the right answer is A & B
upvoted 1 times

🗨️ 👤 **demifsud** 4 years ago

I went with A & B also. Deployment of scripts is allowed in both normal and backup mode.
upvoted 5 times

An administrator is replacing a device on FortiManager by running the following command: `execute device replace sn <devname> <serialnum>`.

What device name and serial number must the administrator use?

- A. Device name and serial number of the original device.
- B. Device name and serial number of the replacement device.
- C. Device name of the replacement device and serial number of the original device.
- D. Device name of the original device and serial number of the replacement device.

Suggested Answer: D

Community vote distribution

D (100%)

🗳️ **Cyril_the_Squirrel** 2 years, 10 months ago

Selected Answer: D

D is Correct

upvoted 2 times

🗳️ **coredpt** 2 years, 12 months ago

D is correct

upvoted 1 times

🗳️ **vagedis** 3 years ago

D for sure

upvoted 1 times

🗳️ **yadavarya97** 3 years, 2 months ago

D is correct.

upvoted 1 times

🗳️ **Solanki** 3 years, 7 months ago

D is correct

upvoted 1 times

🗳️ **xijiansh** 3 years, 7 months ago

D definitely

upvoted 1 times

🗳️ **Dee244** 3 years, 8 months ago

D is correct, Study Guide6.2, page 289

upvoted 3 times

🗳️ **mmelo** 3 years, 9 months ago

D is correct

upvoted 2 times

🗳️ **rcharger00** 3 years, 10 months ago

D correct

devname = Original FortiGate device name

serialnumber = Serial number of replaced FortiGate

upvoted 4 times

Refer to the exhibit.

```
FortiManager # diagnose dvm device list
--- There are currently 1 devices/vdoms managed ---

TYPE          OID   SN      HA   IP          NAME          ADOM      IPS          FIRMWARE
fmg/faz enabled 157   FGVM01.. -   10.200.1.1   Local-FortiGate My_ADOM   14.00641 (regular) 6.0 MR2 (866)
|- STATUS: dev-db: modified; conf: in sync; cond: pending; dm: retrieved; conn: up

|- vdom:[3]root flags:0 adom:My_ADOM pkg:[imported]Local-FortiGate
```

Which two statements about the output are true? (Choose two.)

- A. The latest revision history for the managed FortiGate does not match with the device-level database.
- B. Configuration changes directly made on FortiGate have been automatically updated to the device-level database.
- C. The latest revision history for the managed FortiGate does match with the FortiGate running configuration.
- D. Configuration changes have been installed on FortiGate, which means the FortiGate configuration has been changed.

Suggested Answer: AC

Community vote distribution

A (100%)

 **slegers_y** Highly Voted 3 years, 11 months ago

A and C are the correct answers.

Sync means synchronized (revision history and FGT config are the same)

Modified means the there are changes on Fortimanager configuration (Device DB)

upvoted 13 times

 **h0p3l3ss** Most Recent 2 years, 2 months ago

Selected Answer: A


Only A is correct!

upvoted 1 times

 **jarz** 2 years, 9 months ago

I think it's A and D

upvoted 2 times

 **coredpt** 2 years, 12 months ago


A and C

upvoted 2 times

 **vagedis** 3 years ago


This can never be A and C as the first part of the answer A is the opposite of Answer C

upvoted 1 times

 **vagedis** 3 years ago

I misread the question A+ C is right

upvoted 1 times

 **Solanki** 3 years, 7 months ago

A & C correct. verified.

upvoted 3 times

An administrator would like to review, approve, or reject all the firewall policy changes made by the junior administrators. How should the Workspace mode be configured on FortiManager?

- A. Set to workflow and use the ADOM locking feature
- B. Set to read/write and use the policy locking feature
- C. Set to normal and use the policy locking feature
- D. Set to disable and use the policy locking feature

Suggested Answer: A

  **Dee244** Highly Voted 3 years, 8 months ago

A is correct

https://help.fortinet.com/fmgr/50hlp/52/5-2-0/FMG_520_Online_Help/200_What's-New.03.03.html



upvoted 9 times

  **Office2022** Most Recent 1 year, 10 months ago

D



The workspace mode setting should be configured on FortiManager as "workspace" to enable the policy locking feature. This will allow the administrator to review, approve, or reject all the firewall policy changes made by junior administrators. The policy locking feature will ensure that the changes made by junior administrators are visible to the administrator and can be reviewed, approved or rejected as necessary.

upvoted 1 times

  **re_john** 2 years, 11 months ago

Correct answer is A. Page 239 of the FMG 6.4 study guide.

upvoted 1 times

  **coredpt** 2 years, 12 months ago

A is correct

upvoted 1 times

  **vagedis** 3 years ago

A is correct

upvoted 1 times